


PCE data sheet

article#	370100
article description	Wallbox EV11 5m charging cable Typ2 11kW
description long	Wallbox EV11 - charging station for electric vehicles Connection: (230)400V AC, 50Hz, (single)3-phase Number of charging units: 1 fixed charging cable 5m with Type 2 connector Max. power per charging point: 11kW (3,7kW single phase) Charging current (max): 16A Nominal connection power: 11kW Protection: integr. DC failure current (6mA) Material housing/cover: plastic/metal (similar to RAL7016) Lockable cover WxHxD: 248x337x124 mm Mounting method: Wall mounting Degree of protection: IP44 Impact strength: IK08 Ambient temperature: -25°C bis +40°C Standards: acc. EN 61851-1, IEC 61439-7
GTIN (EAN)	9003399522161
country of origin	PL
customs number	85371098
net weight	4.650 kg
packaging quantity	1
minimum order quantity	1

ETIM 8.0	EC002883
Installation side connection model	3-phase
Number of charging units	1
Max. power per charging point	11 kW
Nominal connection power	11 kW
Width	248 mm
Height	337 mm
Depth	124 mm
Mounting method	Wall mounting
Number of vehicle connectors Type 2	1
Material housing	Plastic
Degree of protection (IP)	IP44
Impact strength	IK08

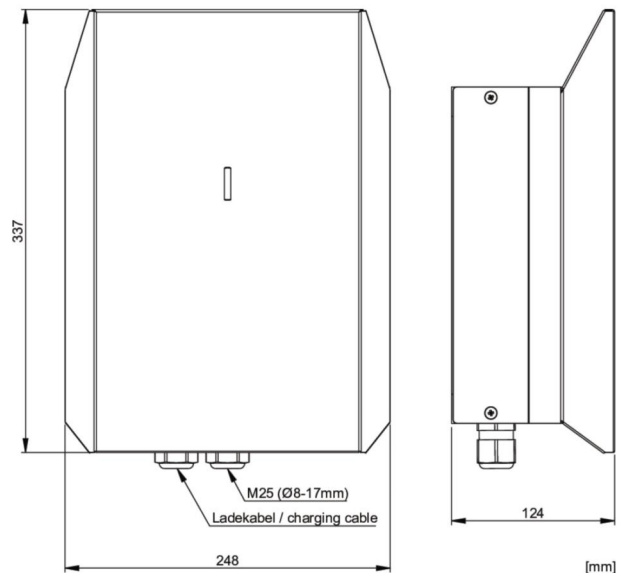

<https://www.pcelectric.at/shop/en/?func=detail&artnr=370100>



www.manufacturer-safety.info